

	<b>INDICATES SIEVE TEST</b>		<b>INDICATES GROUNDWATER OBSERVED</b>
<b>TEST PIT # 1</b>		<b>TEST BY: PATRICK H. CARRARA, III</b>	
<b>GROUND EL. 103.61</b>		<b>WITNESSED BY: TOM RYDER</b>	
<b>ESCHGW: 97.61</b>		<b>CERTIFIED BY: PATRICK H. CARRARA, III</b>	
<b>DATE: 01/07/2020</b>		<b>*APPROVED SOIL EVALUATOR NUMBER SE3336</b>	

ELEVATION	SURFACE DEPTH (IN.)	SOIL HORIZ.	SOIL TEXTURE	SOIL COLOR	SOIL MOTTLING	OTHER	
103.61	0-55"	Fill			<div style="writing-mode: vertical-rl; transform: rotate(180deg);">REMOVE</div>	FILL, ROOTS	
99.03	55-61"	Ab	SANDY LOAM	10YR2/2		BURIED A HORIZON, ROOTS	
98.53	61-81"	Bw	SANDY LOAM	10YR5/6		72" 30K 7.5YR 5/8 5Y 6/2	MEDIUM
96.86	<div style="text-align: center;"> </div> 81-132"	C1	SANDY LOAM	5Y5/3		UNSORTED FINE GRAINED, SCALED, SATURATED	
92.61	SOIL SAMPLE FOR ELUVE ANALYSIS TAKEN AT 90±"					UNCOMPACTED	

<b>WEEPING OBSERVED @ 81" EL=96.86</b>	<b>PERC RATE N/A</b>	<b>MIN/INCH N/A</b>
<b>STANDING OBSERVED @ N/A</b>	<b>PERC DEPTH N/A</b>	<b>INCHES N/A</b>

1. 310 CMR 15.405(1)(g) REDUCE THE 100 FT. SETBACK FROM THE S.A.S. TO A PRIVATE ON-SITE POTABLE WELL TO 76 FT. UPGRADE REQUESTED BASED ON THE LIMITED AREA AVAILABLE TO SIT S.A.S. DUE TO THE PROXIMITY OF THE WETLANDS, PROPERTY LINE, AND EXISTING DWELLING.
2. 310 CMR 15.405(1)(i) TO ALLOW SIEVE ANALYSIS TO ESTABLISH SOIL CLASSIFICATION AND A PERCOLATION RATE APPROPRIATE FOR THE SOIL CLASS.
3. 310 CMR 15.405(1)(b) REDUCE THE 20 FT. SETBACK FROM THE S.A.S. TO THE EXISTING DWELLING TO 10 FT.
4. 310 CMR 15.405(1)(e) REDUCE THE 50 FT. SETBACK OF THE S.A.S. TO THE B.V.W. TO 31 FT.

1. THE PROPOSED WORK IS WITHIN THE JURISDICTION OF THE CONSERVATION COMMISSION. WORK SHALL NOT COMMENCE UNTIL A NEGATIVE DETERMINATION OR ORDER OF CONDITIONS IS ISSUED BY THE CONSERVATION COMMISSION. ANY REQUIREMENTS AND/OR WORK REQUIRED BY THE COMMISSION'S DECISION SHALL BE INCLUDED IN THE SCOPE OF WORK.

ELEVATION SCHEDULE		ELEVATION (Ft.)
TOP OF FOUNDATION		106.46
NEW SEWER INVERT AT FOUNDATION		103.35
SEWER INVERT INTO SEPTIC TANK		103.14
SEWER INVERT OUT OF SEPTIC TANK		102.89
SEWER INVERT INTO D-BOX		102.57
SEWER INVERT OUT OF D-BOX		102.40
SEWER INVERT INTO LEACHING SYSTEM		102.28
TOP OF CHAMBER (BREAKOUT)		102.78
BOTTOM OF LEACHING FIELD		101.70
WATER TABLE (TP)		97.61

DESIGN FLOW 4 BEDROOMS x 110 GPD/BEDROOM = 440 GPD

SEPTIC TANK 440 GPD x 200% = 880 GALLONS.  
REQUIRED: MIN. 1,500 GALLON SEPTIC TANK REQUIRED  
MULTIPLE COMPARTMENT TANKS

FIRST COMPARTMENT / TANK:  
48 HRS. HYDRAULIC DETENTION = 880\_GAL  
CAPACITY PROVIDED = 1,000\_GAL

SECOND COMPARTMENT / TANK:  
24 HRS. HYDRAULIC DETENTION = 440\_GAL  
CAPACITY PROVIDED = 500\_GAL

LEACHING AREA SIEVE ANALYSIS: 77.7% SAND, 8.6% SILT & 13.7% CLAY;  
REQUIRED: SANDY LOAM - CLASS II SOIL  
USE EFFLUENT LOADING RATE OF 0.33\* GPD/SF  
440 GPD/0.33\* GPD/SF=1,334 S.F.



\* PER DEP POLICY "TITLE 5 ALTERNATIVE TO  
PERCOLATION TESTING GUIDANCE FOR SYSTEM  
UPGRADES"  
EFFECTIVE DATE: MAY 3, 2006.

LEACHING AREA 5 ROWS OF 11 ARC 36 CHAMBERS & 1 SIDE PORT COUPLER.  
PROVIDED: 55 TOTAL CHAMBERS & 5 SIDE PORT COUPLERS.  
5 ROWS @ 56.17' x 4.8' S.F./L= 1,348.08 S.F.  
1348.08 S.F. x 0.33 GPD/S.F. = 444.87 GPD  
SINCE 444.87 GPD > 440 GPD 0.K.

\* EFFECTIVE LEACHING AREA PER TABLE 3 OF  
CERTIFICATION FOR GENERAL USE ISSUED TO  
INFILTRATOR WATER TECHNOLOGIES, LLC. ON JUNE  
12, 2015 (TRANSMITTAL # X264258)


NOTE : SYSTEM NOT DESIGNED FOR USE WITH A GRASS GRINDER.

NOTE : SYSTEM NOT DESIGNED FOR USE WITH A GARBAGE GRINDER.

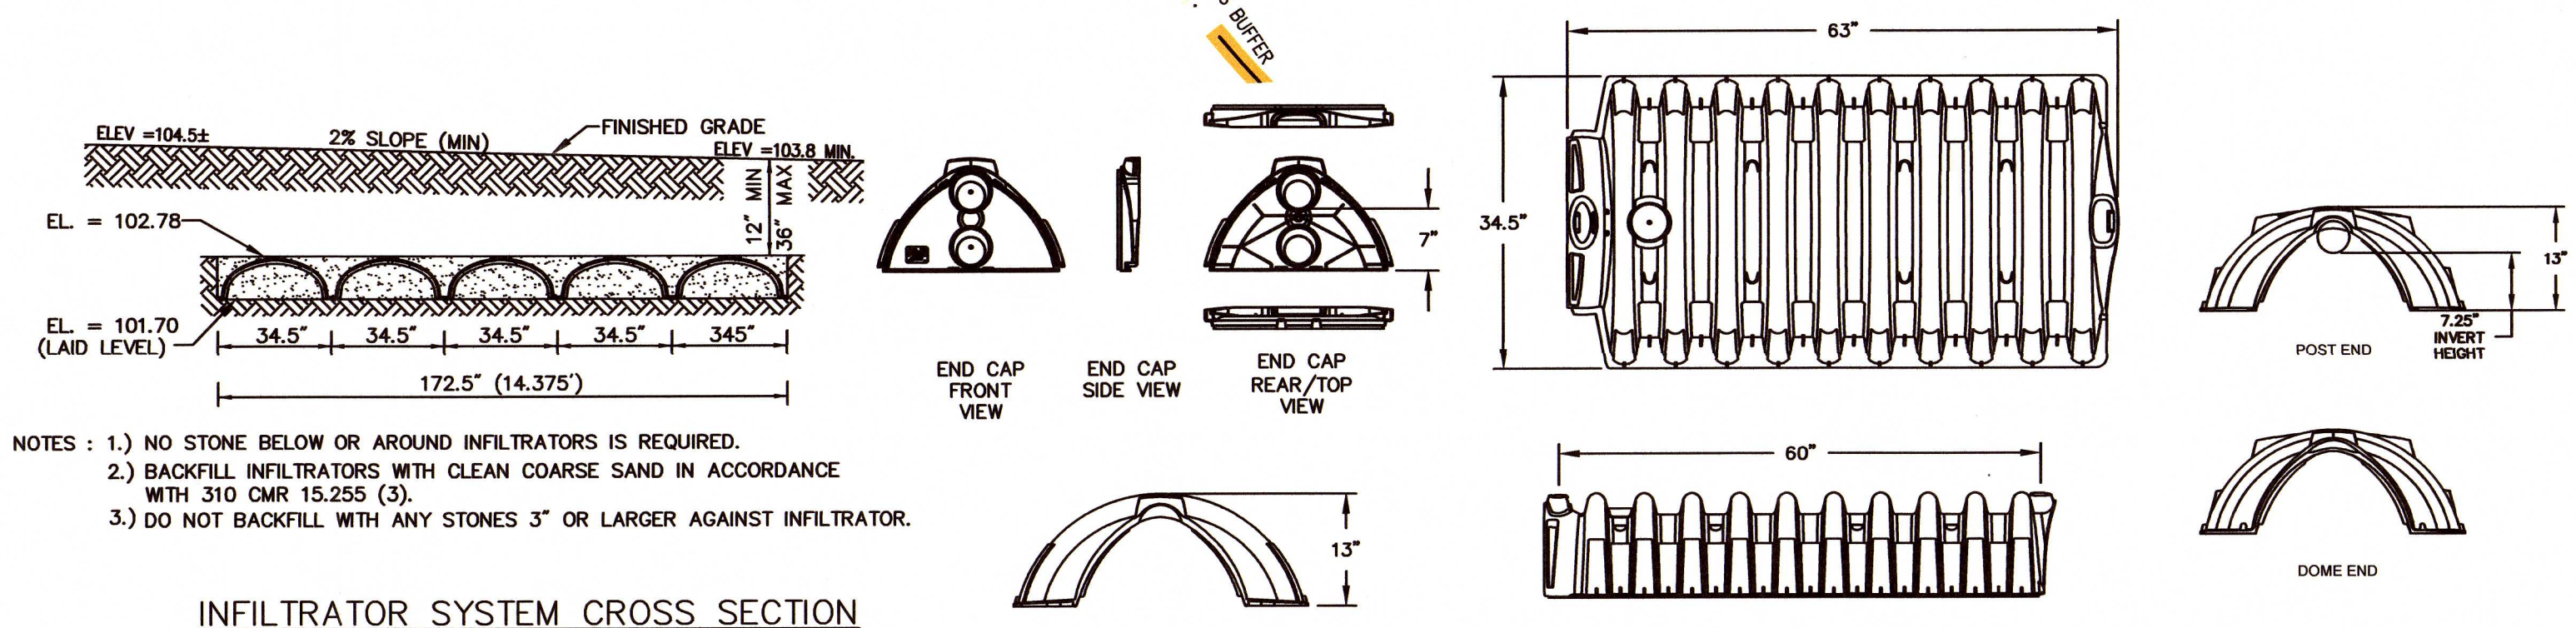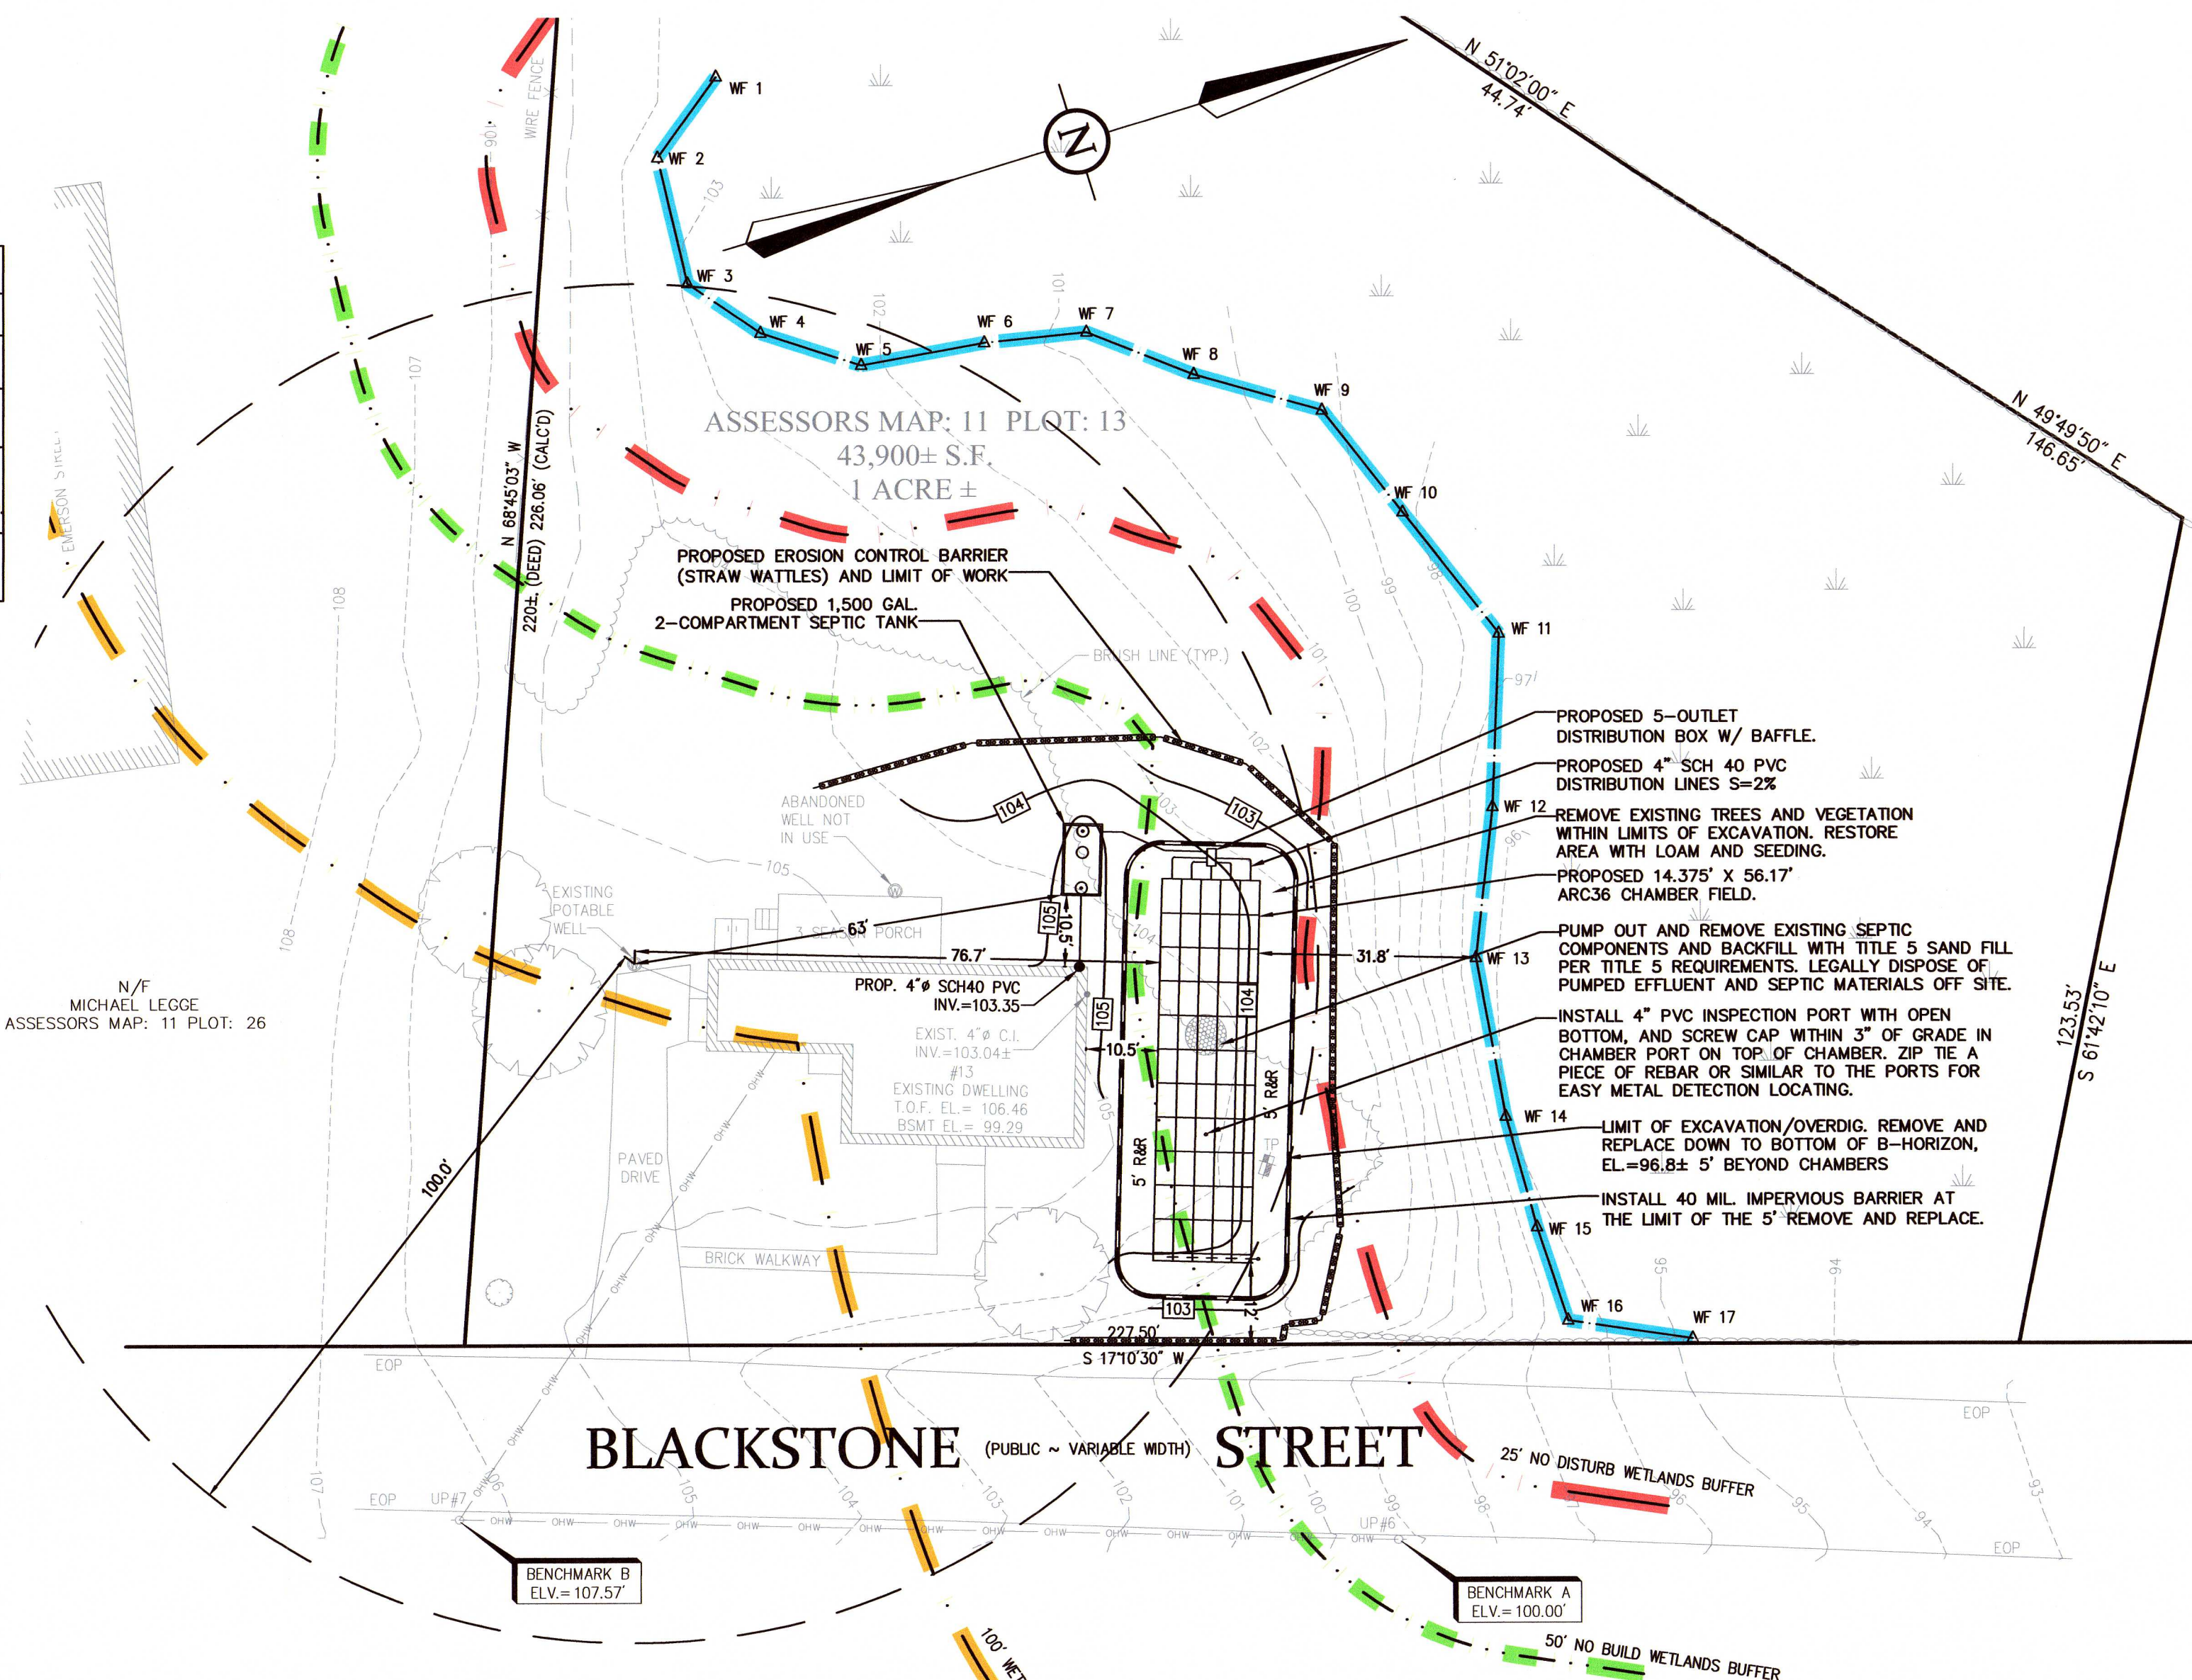

### INFILTRATOR SYSTEM CROSS SECTION

### ARC 36 CHAMBER, END CAP AND SIDE PORT COUPLER

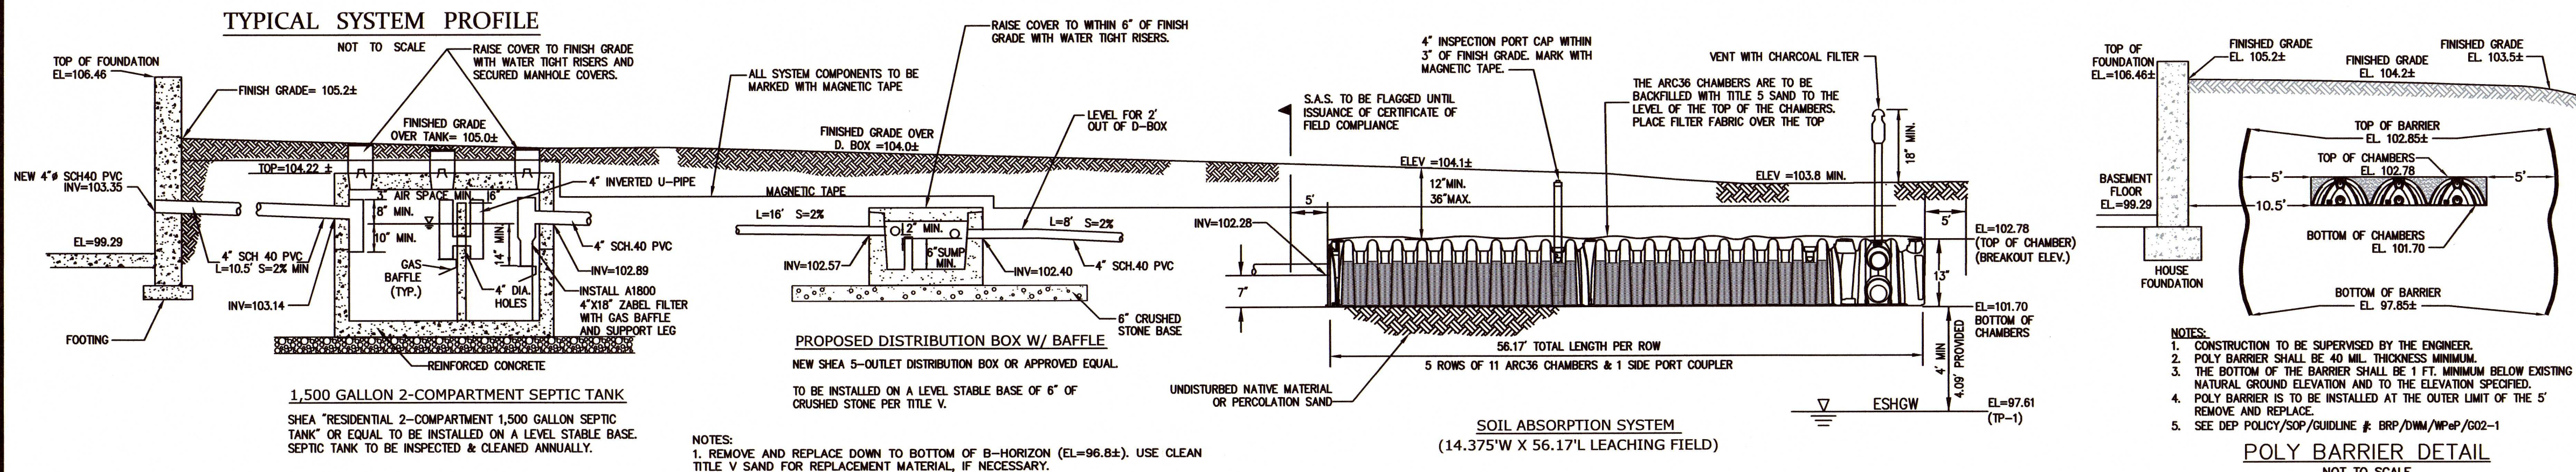


1. THIS PLAN HAS BEEN DESIGNED IN ACCORDANCE WITH TITLE 5 OF THE STATE SANITARY CODE, 310 CMR 15.000.
2. ALL SYSTEM COMPONENTS SHALL BE INSTALLED IN ACCORDANCE WITH TITLE 5 OF THE STATE SANITARY CODE, 310 CMR 15.000, AS AMENDED AND IN EFFECT AS OF SEPTEMBER 9, 2016, AND ANY LOCAL RULES APPLICABLE.
3. ANY CHANGE TO THIS PLAN MUST BE APPROVED IN WRITING BY THE DESIGN ENGINEER AND BOARD OF HEALTH.
4. BENCHMARK SHOWN ON PLAN IS TO BE VERIFIED BY THE CONTRACTOR. ANY DISCREPANCIES MUST BE RESOLVED WITH THE ENGINEER PRIOR TO CONSTRUCTION.
5. THIS SYSTEM IS NOT DESIGNED TO ACCOMMODATE A GARBAGE GRINDER.
6. SOIL CONDITIONS CAN VARY. GROUNDWATER ELEVATION AND THE LIMITS OF ACCEPTABLE SOIL MUST BE VERIFIED PRIOR TO INSTALLATION OF THE SOIL ABSORPTION SYSTEM (SAS).
7. LOCATIONS OF UTILITIES ARE APPROXIMATE. CONTRACTORS SHALL NOTIFY DIG SAFE (DIAL 811 OR 1-888-344-7233) AT LEAST 72-HOURS PRIOR TO BREAKING GROUND TO HAVE ALL EXISTING UTILITIES LOCATED AND CLEARLY MARKED.
8. ALL SYSTEM COMPONENTS TO BE H-10 RATED (MINIMUM).
9. HEAVY EQUIPMENT SHALL NOT BE ALLOWED TO OPERATE OVER THE LIMITS OF THE SEWAGE DISPOSAL SYSTEM DURING THE COURSE OF CONSTRUCTION OF THE SYSTEM.
10. BACKFILL OVER SAS MUST BE CLEAN AND FREE OF STONES >6 IN AND TAILINGS, CLAY OR SIMILAR MATERIALS. PLACE IN LIFTS AND SUFFICIENTLY COMPACT TO PREVENT DEPRESSIONS DUE TO SETTLING. MINIMUM 2% SLOPE REQUIRED OVER LEACHING AREA IN FINAL GRADING.
11. DESIGN ENGINEER TO BE NOTIFIED AT LEAST 48 HOURS PRIOR TO REQUIRED INSPECTIONS.
12. AN AS-BUILT SURVEY OF THE SYSTEM IS REQUIRED. ENGINEER AND BOARD OF HEALTH SHALL BE NOTIFIED FOR INSPECTION OF FIELD LOCATION PRIOR TO BACKFILLING/COVERING THE SYSTEM COMPONENTS. INSTALLER SHALL PROVIDE ENGINEER WITH RESULTS OF FILL SOIL SIEVE ANALYSIS BEFORE THE AS-BUILT CERTIFICATION WILL BE RELEASED.
13. THIS PLAN IS THE RESULT OF AN ON THE GROUND FIELD SURVEY BY THIS FIRM ON & BETWEEN 1/1/2020 & 2/5/2020
14. SUBJECT SITE IS NOT LOCATED WITHIN AN AREA OF CRITICAL ENVIRONMENTAL CONCERN (ACEC).
15. THERE ARE NO KNOWN OR PROPOSED WELLS WITHIN 100 FEET OF PROPOSED SAS EXCEPT AS INDICATED ON THIS PLAN.
16. WETLAND DELINEATION BY: ENVIRONMENTAL CONSULTING & RESTORATION, LLC. DELINEATION PERFORMED ON JANUARY 22, 2020.
17. CONTRACTOR IS RESPONSIBLE FOR OBTAINING ANY APPLICABLE PERMITS.
18. CONTRACTOR SHALL MECHANICALLY COMPACT BASE UNDER SEPTIC TANK AND DISTRIBUTION BOX (IF INSTALLED IN FILL SOIL).
19. CONTRACTOR SHALL DECOMMISSION THE EXISTING SEPTIC SYSTEM COMPONENTS IN ACCORDANCE WITH 310 CMR 15.354, IF APPLICABLE.
20. CONTRACTOR SHALL RESTORE (LOAM & SEED) ALL AREAS DISTURBED DURING THE CONSTRUCTION.
21. LOCUS REFERENCE: DEED BOOK 54857, PAGE 324.
22. OWNER SHALL HAVE TANK INSPECTED AND/OR CLEANED ANNUALLY. ZABEL FILTERS SHALL BE CLEANED REGULARLY AND AT EACH TIME OF TANK PUMPING.
23. PROJECT BENCHMARK:  
BENCHMARK A: NAIL IN UTILITY POLE-6 EL.=100.00 ASSUMED DATUM  
BENCHMARK B: NAIL IN UTILITY POLE-7 EL.=107.57 ASSUMED DATUM
24. THE PROPERTY IS SERVED BY A PRIVATE ONSITE WELL. THE LOCATION OF THE WELL IS SHOWN.
25. THE SITE IS NOT LOCATED IN A ZONE II TO A PUBLIC WATER SUPPLY.

REQUIRED INSPECTIONS (CONTACT BOH)

1. BOTTOM OF EXCAVATION;
2. TANK, PIPING, AND DISTRIBUTION BOX AND LINES PRIOR TO BACKFILLING;
3. FINAL COVER AND GRADING.

1. WITHIN AREAS SHOWN ON THE PLAN, ALL UNDESIRABLE MATERIAL (E.G., TOPSOIL AND SUBSOIL) SHALL BE REMOVED AND REPLACED WITH FILL SOIL. CONSIST OF SELECT ON-SITE OR IMPORTED MATERIAL. THE FILL SOIL SHALL BE COMPRISED OF CLEAN GRANULAR SAND, FREE FROM ORGANIC MATERIAL AND DELECTUS SUBSTANCE. HOWEVER, ALL LAYERS OF DIFFERENT TYPES OF SOIL SHALL NOT BE REMOVED. THE FILL SHALL CONTAIN ANY MATERIAL LARGER THAN TWO INCHES. A SEVE ANALYSIS, USING A #4 SEIVE, SHALL BE PERFORMED ON A REPRESENTATIVE SAMPLE OF THE FILL. UP TO 45% BY WEIGHT OF THE FILL SAMPLE MAY BE RETAINED ON THE #4 SEIVE. SEVE ANALYSES ALSO SHALL BE PERFORMED ON THE FRACTION OF THE FILL SAMPLE PASSING THE #4 SEIVE, SUCH ANALYSES MUST DEMONSTRATE THAT THE MATERIAL MEETS EACH OF THE FOLLOWING SPECIFICATIONS:


SIEVE SIZE	EFFECTIVE PARTICLE SIZE	% THAT MUST PASS SIEVE
# 4	4.75 MM	100%
# 50	0.30 MM	10% - 100%
#100	0.15 MM	0% - 20%
#200	0.075 MM	0% - 5%

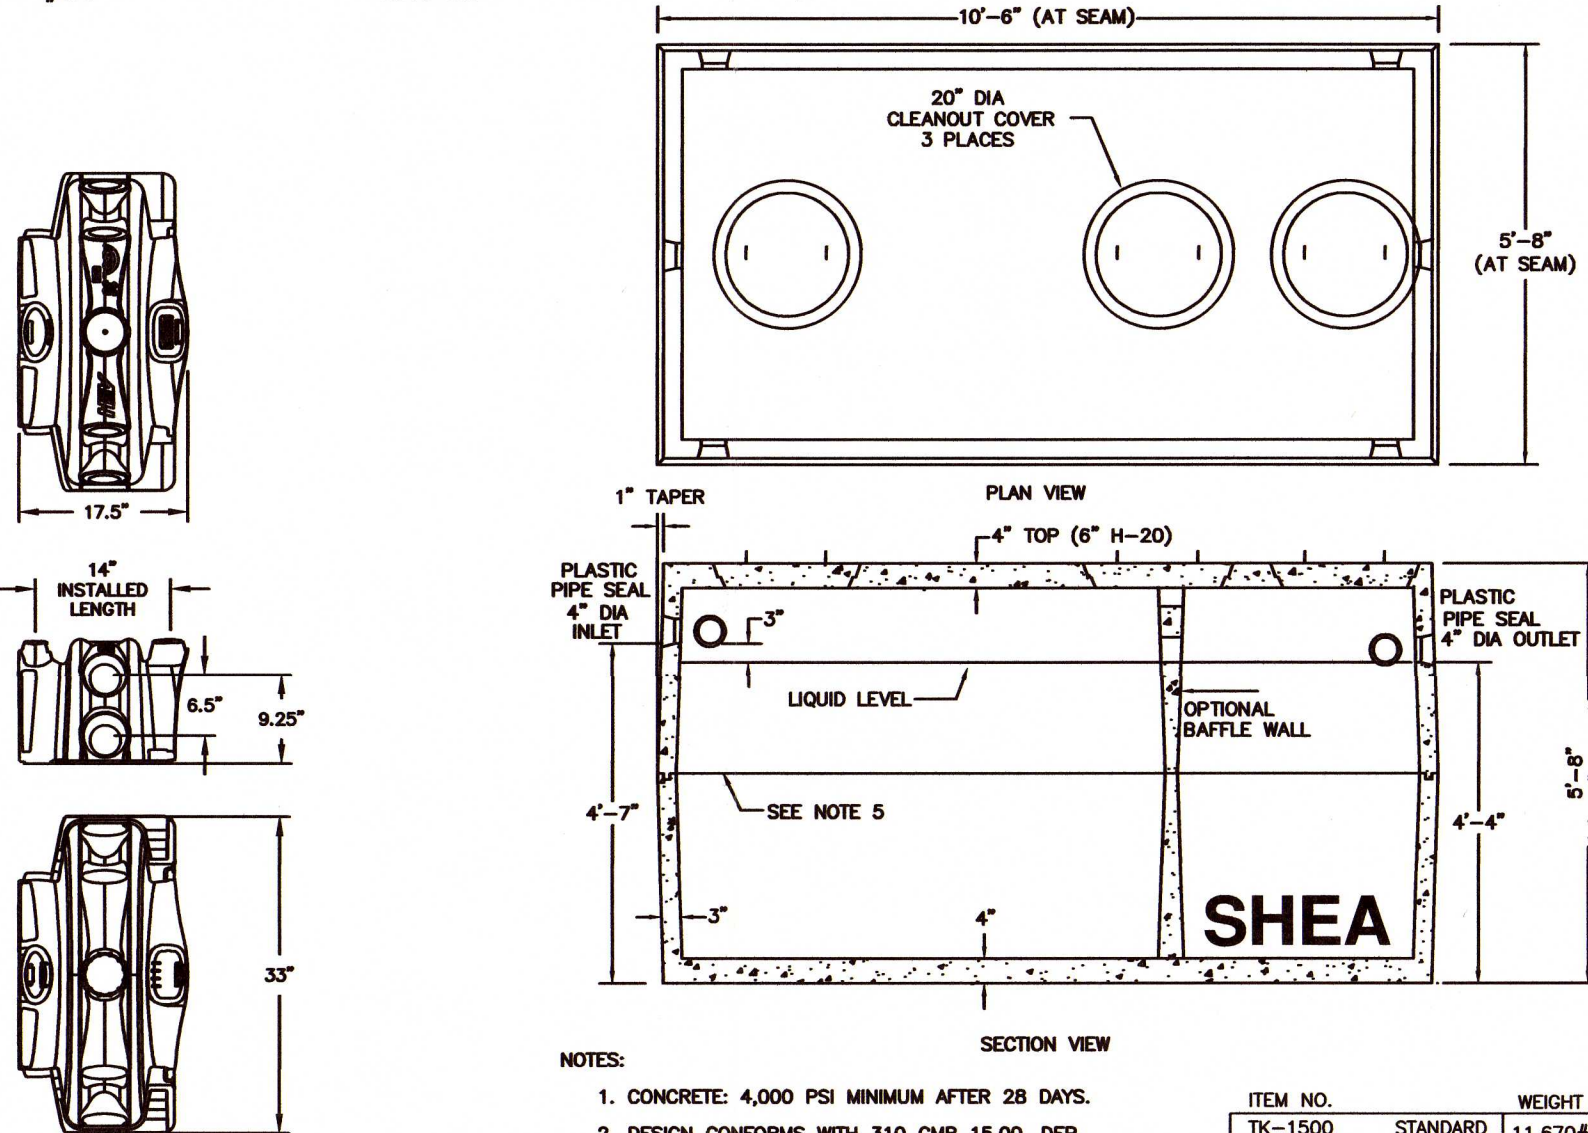


1. CONCRETE: 4,000 PSI MINIMUM AFTER 28 DAYS.
2. DESIGN CONFORMS WITH 310 CMR 15.00, DEP TITLE 5 REGS, FOR SEPTIC TANKS.
3. ALL REINFORCEMENT PER ASTM C1227-93.
4. BAFFLE WALL OPTIONAL FOR TWO COMPARTMENT TANKS.
5. TEES AND GAS BAFFLE SOLD SEPARATELY.
6. TONGUE & GROOVE Joints SEALED WITH BUTYL RESIN.
7. ALSO AVAILABLE IN H-20 LOADING.

ITEM NO.		WEIGHT
TK-1500	STANDARD	11,670#
TK-1500H	H-20	13,135#
TK-15002C	STANDARD	12,930#
TK-15002CH	H-20	14,395#

## 5-OUTLET DISTRIBUTION BOX WITH BAFFLE

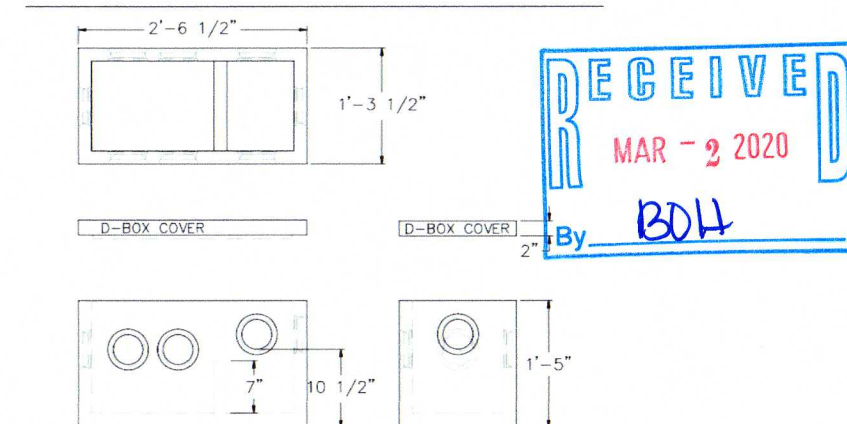

DESIGN NOTES:  
1. CONCRETE 4,000 PSI @ 28 DAYS  
2. KNOCK-OUT OPENINGS FOR 4" PVC  
3. 15" RISER SECTION AVAILABLE  
4. H-10 & H-20 LOADING AVAILABLE

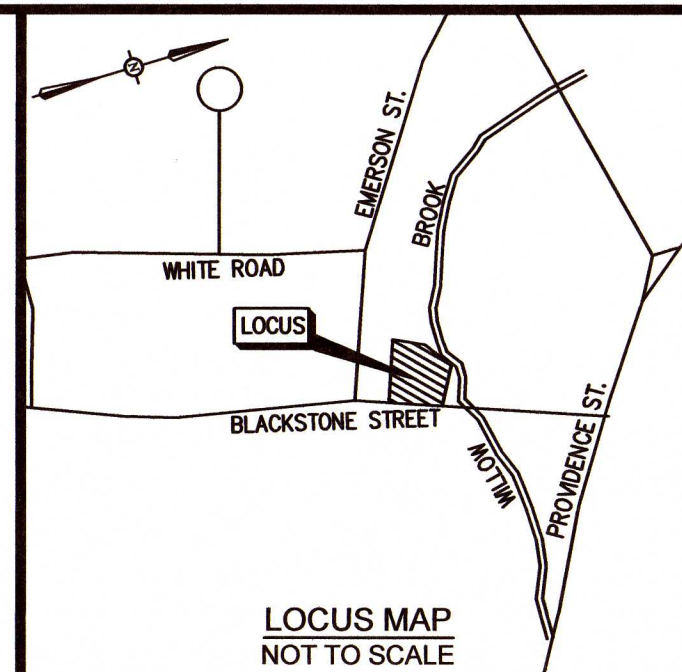[illegible]

CHECKED BY: GWD/EP.


DESIGNED BY: GWD

13 BLACKSTONE STREET  
IN  
MENDON  
(WORCESTER COUNTY)  
MASSACHUSETTS

FEBRUARY 20, 2020

PREPARED FOR:

SIMAR HOUSE, INC  
102 MAPLE SPRINGS RD  
WAREHAM, MA  
02571

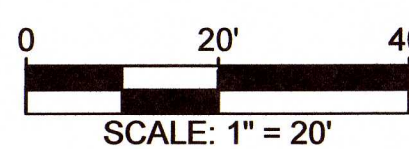

**PMP**  
**PMP Associates**

200 North Bedford Street  
East Bridgewater, Massachusetts 02333  
Phone: 508-378-3421  
[www.pmpassoc.com](http://www.pmpassoc.com)



2/20/2020

SHEET 1 OF 1

JOB NUMBER: 02-2019-047